



# ENRG Blanket®

## PRECISE TEMPERATURE CONTROL FOR BUILDING ENERGY EFFICIENCY

Using BioPCM® Engineered Smart Material

Optimizes HVAC Power Consumption

Extends HVAC Equipment Lifetime

Reduces Carbon Footprint



**25-35%**  
REDUCTION OF  
**HVAC**  
**COSTS**

**15-20%**  
REDUCTION OF  
**HVAC**  
**RUNTIME**

**20-25%**  
REDUCTION OF  
**HVAC**  
**CYCLING**


## What is the ENRG Blanket?

ENRG Blanket® is a drop-in solution powered by our proprietary BioPCM® platform which absorbs and releases significant thermal energy at a specific design temperature resulting in lower heating and cooling energy use by up to 35%.

BioPCM® expected to outlive the useful life of your building.

- Optimizes HVAC power consumption
- Extends HVAC equipment lifetime
- Reduces carbon footprint



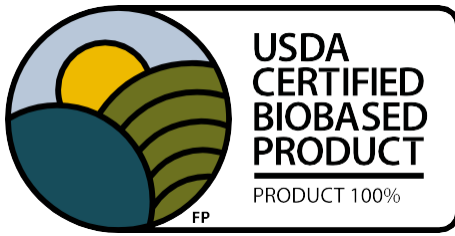

Phase Change Solutions earns USDA certified biobased product label with 100% biobased content.



This certification verified that BioPCM® is composed of 100% biobased content. Third-party verification for a product’s biobased content is administered through the USDA BioPreferred program

SHEET SIZES AND DESIGN OPTIONS	
ENRG Blanket® products are shipped prefabricated in 24” x 48” sheets	

PRODUCT SPECIFICATIONS	
COMMON DESIGN TEMPS	23, 25, 27, 29°C (73, 77, 80, 84°F)
SPECIFIC HEAT OF BIOPCM®	2.0– 2.5 J/g°C
LATENT HEAT	210 J/g (85/lb)
WEIGHT OF BLANKET	0.6 to 1 lb/ft²
RECOMMENDED COVERAGE	65-85% of conditioned square footage

FIRE RATINGS	
ENRG Blanket meets the following safety standards:	
ASTM E84, UL 723, and CAN/ULC S102-10	Standard test method for Surface Burning Characteristics of Building Material
ASTM E800	Standard guide for measurement of gases present or generated during fires

# INSTALLATION TYPES

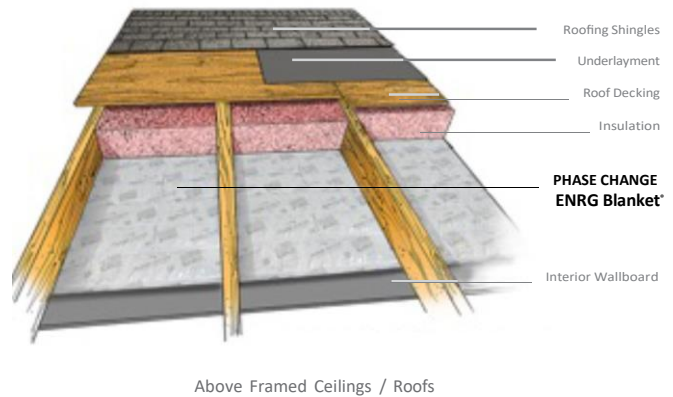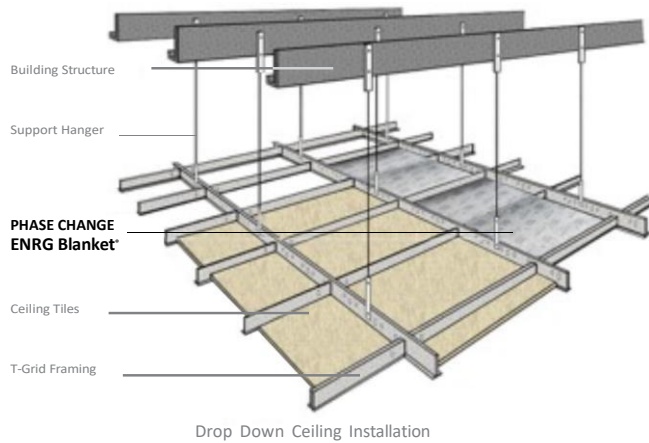

## Drop Down Ceiling (Ceiling Grids)

ENRG Blankets® may be installed over ceiling panels in new buildings or as a retrofit solution for existing buildings to lower HVAC demand. Blankets can also be installed in a single room or zones to mitigate "hot office syndrome." Works well in high performing buildings with minimal disturbance to occupants.



## Above Framed Ceilings

ENRG Blanket® may be installed in new buildings and during renovations of interior spaces. It can be placed under framed ceilings, before drywall application, to lower energy demands for improved occupant comfort. Install in accordance with the following.





Smart Materials For People and The Planet

813 WINSTON ST, GREENSBORO, NC 27405  
WWW.PHASECHANGE.COM / INFO@PHASECHANGE.COM  
800-283-7887 (U.S.) / 336-510-4406 (INTERNATIONAL)